

# PK-2

## Test Blocks and Plugs

### Application

For mounting on switchboard panels for use in conjunction with proper test equipment to facilitate the testing of ac instruments, meters and relays.

### Features

Type PK-2 test blocks are essentially 4-pole and 6-pole jacks, provided with molded Textolite covers that have internal plug contacts, which make a through connection when the cover is in place. The contacts in the blocks are of the linepressure type and provide positive contact with minimum contact resistance. For all current circuits, auxiliary contacts are used which automatically short circuit the current transformer when the cover, or plug is removed. The test plugs, provided with studs and links, can be permanently connected to the testing equipment for any of the various test methods in use. Routine testing can be accomplished simply by removing the cover and substituting the properly connected test plug; normal connections are restored by replacing the cover.

Contact rating is 250 volts, 10 amperes continuously.



4-pole block with cover



4-pole test plug

### Explanation of Listing

The Cat. No. for each form of block includes the PK-2 block and cover with a set of unmounted auxiliary contacts, jumpers, and screws in sufficient variety and quantity to provide the combinations to suit any application desired, typical arrangements of which are shown in Fig. 10 to 15 inclusive. The Cat. No. and price include mounting screws, nuts for the studs, and (for blocks for mounting on 1/8-1/2-inch panels) bushings for the studs. Test links for test plug are supplied with the plug: 4 with the 4-pole, 6 with the 6-pole.

### PK-2 Test Blocks with Covers

4-Pole			6-Pole		
Catalog Number <sup>1</sup>		Net Weight in lb	Catalog Number <sup>1</sup>		Net Weight in lb
Surface Mounting on 1-, 1.5-, 2-inch panels (Fig. 3 and 5)	Semiflush Mounting on 1/8-inch panels or Surface Mounting on 1/8-in. to 1/2 inch panels (Fig. 3 and 6 or 7)		Surface Mounting on 1-, 1.5, 2-inch panels (Fig. 4 and 5)	Semiflush Mounting on 1/8-inch panels or Surface Mounting on 1/8-inch to 1/2 inch panels (Fig. 4 and 6 or 7)	
6422120G1	6422120G3	2	6422120G2	6422120G4	3

<sup>1</sup> - Auxiliary Contacts, jumpers, screws, mounting screws, and bushings, as required, included in catalog number and price.


### Test Plugs (Fig. 2 and 8)

4-Pole		6-Pole	
Catalog Number	Net Weight in lb	Catalog Number	Net Weight in lb
6129533G1	1.25	6129533G2	1.75



## Dimensions

Subject to change and not to be used for construction without approval.

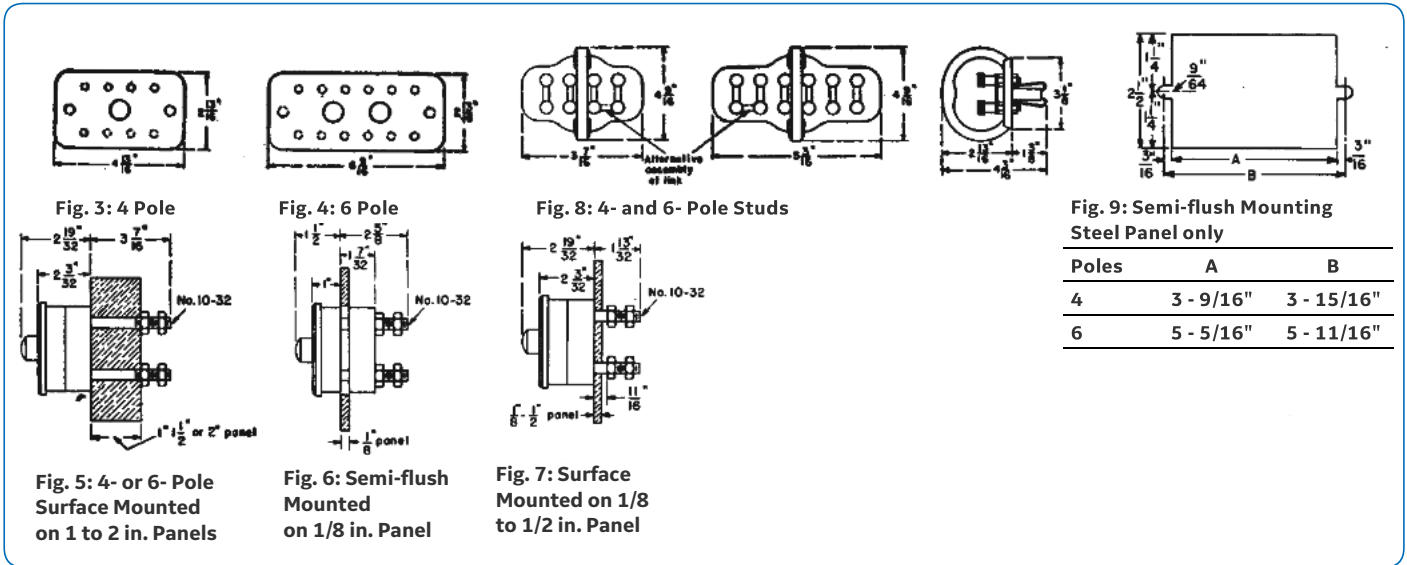

## Assembly

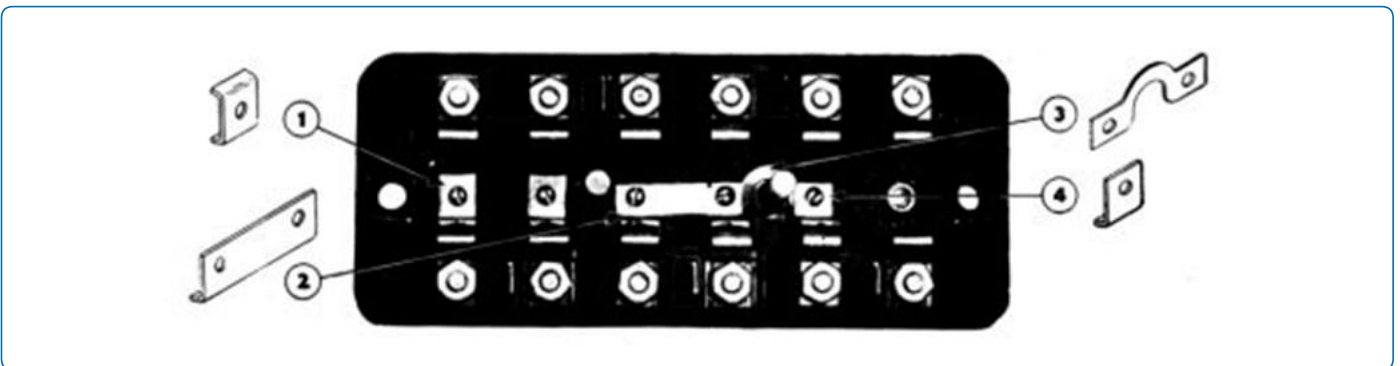


Fig. 9 shows a composite assembly of a 6-pole PK-2 test block with auxiliary contacts and jumpers, as follows:

No. 1 — Auxiliary contact (Cat. No. 6179685G3) used as a bridge to maintain the circuit during the period that the cover or the plug is not in place. Without this connection, loss of revenue is possible—because of interrupted operation if the replacement of the cover, or plug, is long delayed.

No. 2— Auxiliary contact (Cat. No. 6179685G2) to short circuit the current transformer when the cover or plug is not in place.

No. 3— Jumper (Cat. No. 6179685G4) to be used in connection with auxiliary contact No. 2 or No. 4, to serve the same purpose as No. 2 in short circuiting a current transformer, or to interconnect phases, when the cover-fastening stud is to be by-passed.

No. 4— Auxiliary contact (Cat. No. 6179685G1) equal to one pole of contact No. 2, to be used in connection with jumper No. 3 as shown in Fig. 9. If all poles are to be

## Typical Arrangements of Type PK-2 Test Blocks with Auxiliary Contacts and Jumpers




Fig. 10: Without Auxiliary Contacts, for Potential Circuits




Fig. 11: With one Auxiliary Contact No 2, for Connections as shown in Fig. 16 and 19




Fig. 12: With Auxiliary Contacts No 1, for Through-current Connection




Fig. 13: With Auxiliary Contacts No 2 and 4, and Jumpers No 3, for Relay and Trip Connections




Fig. 14: With Auxiliary Contacts No 2, for Current Circuits




Fig. 15: With Auxiliary Contacts No 2, and Jumpers No 3, for Current Transformer Short Circuiting

The above auxiliary contacts and jumpers are furnished with the purchase of PK-2 blocks, as follows:

6422120G1 or G3	(1) 6179685G1	6422120G2 or G4	(1) 6179685G1
	(2) 6179685G2		(3) 6179685G2
	(4) 6179685G3		(6) 6179685G3
	(1) 6179685G4		(2) 6179685G4

Jumpers and auxiliary contacts are available as a separate item, only as follows

6422120G8	(1) 6179685G1
	(3) 6179685G2
	(6) 6179685G3
	(2) 6179685G4

## Schematic Connections (Back View)

Current coil Potential coil





Fig. 16: Test-block connection for one current and one potential coil


Potential test coil



Links furnished with plug

Fig. 17: Plug connection for Fig. 16 for testing one current and one potential coil in circuit


Current source Potential source



Link furnished with plug

Fig. 18: Plug connection for Fig. 16 for testing one current and one potential coil with separate source

Relay current coil  
Relay potential coil  
Relay contacts



Trip circuits

Fig. 19: Test-block connection for one current and one potential coil with connection for trip circuit

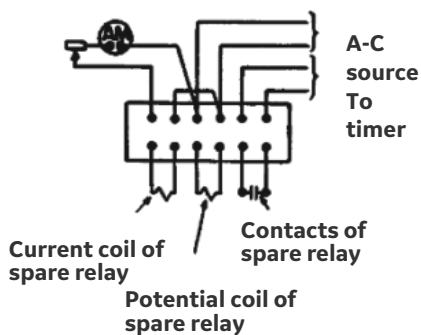


Fig. 20: Plug connection for Fig. 19 for separate test of relay with separate source and spare relay for protection while testing

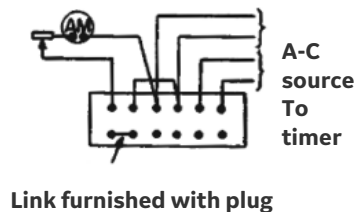


Fig. 21: Plug connection for Fig. 19 for separate test of relay with separate source

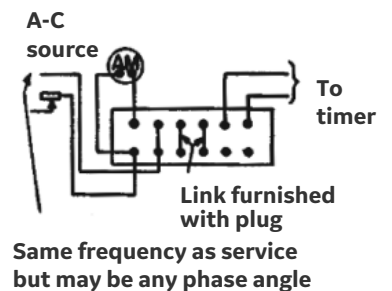


Fig. 22: Plug connection for Fig. 19 for testing relay with same or separate source

[GEGridSolutions.com](http://GEGridSolutions.com)

Grid-AIS-L4-ITL\_Model\_PK\_2-1576-2017\_08-EN. © Copyright 2017. General Electric Company and Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

**Worldwide Contact Center**

Web: [www.GEGridSolutions.com/contact](http://www.GEGridSolutions.com/contact)

Phone: +44 (0) 1785 250 070

USA and Canada: +1 (0) 800 547 8629

Europe, Middle East and Africa: +34 (0) 94 485 88 00

